


model 28HP butt fusion machine



description

The 28HP is designed to take it. A sturdy rectangular frame design provides operators with a rigid and safe fusion platform. The machine's hydraulic system is powered by Connectra's rugged, efficient, easy to maintain hand pump and the ball bearing facer is powered by a durable electric motor. The 28HP is easy to learn and operate and like all Connectra equipment you can expect low maintenance costs and a rapid return on your investment.

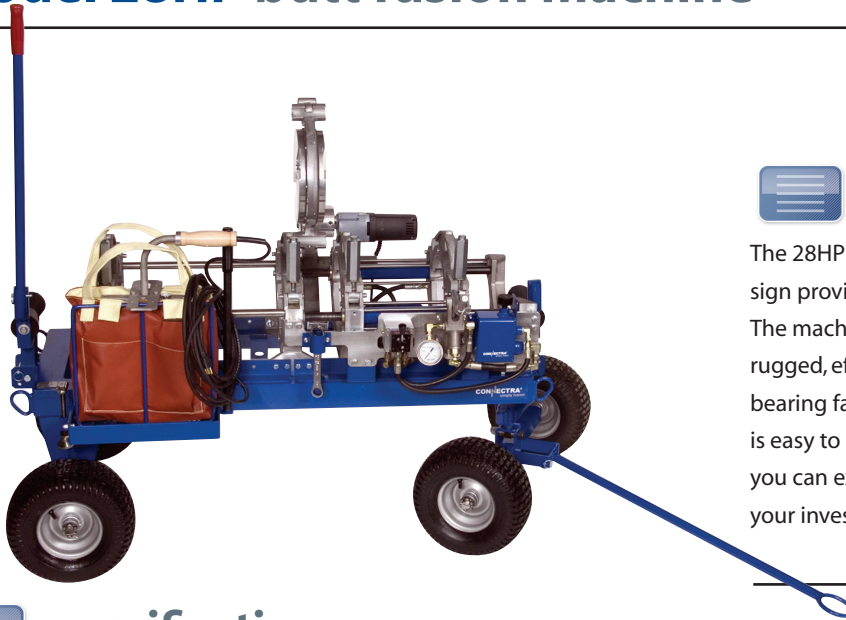

specifications

carriage unit dimensions

Length	28.88 inches	734 mm
Width	31.06 inches	784 mm
Height	23.75 inches	603 mm
Weight	173 pounds	78.5 kg

carriage mounted on frame

Length	62.25 inches	1,581 mm
Width	36.88 inches	937 mm
Height	42.56 inches	1,081 mm
Total Weight (all components)	429 pounds	194.6 kg

capacities

model 28HP 2 inch IPS thru 8 inch DIPS*

model 28HP-225 mm 63 mm thru 225 mm*

electrical data

120 VAC Single Phase

	Watts	Amps
Facer Motor	1,200	10.0
Heater	2,000	16.6
Total Power Consumption	3,200	26.6

240 VAC Single Phase

	Watts	Amps
Facer Motor	1,152	4.8
Heater	2,000	8.3
Total Power Consumption	3,152	13.1

*with the use of optional reducing inserts

•Specifications are subject to change without notice.



features

- ★ Three clamp top unit removes for in-the-ditch butt fusion.
- ★ Pressure gauge for cylinder pressure.
- ★ Ported for DataConnect or other competitive data recorders.
- ★ Front and rear pipe lifters are standard.
- ★ Manual hydraulic pump with pressure gauge offers excellent control of fusion pressures.
- ★ Rugged design with no "bells and whistles" means less maintenance expense.
- ★ A superior piece of equipment at an extraordinary price.
- ★ Limited three-year warranty.



options/accessories

Choose from a complete range of accessories for the 28HP. Ask about reducing and mitered inserts, (available in IPS, DIPS and metric), stub end holder, and pipe stands.